

PN 0535-0133-000

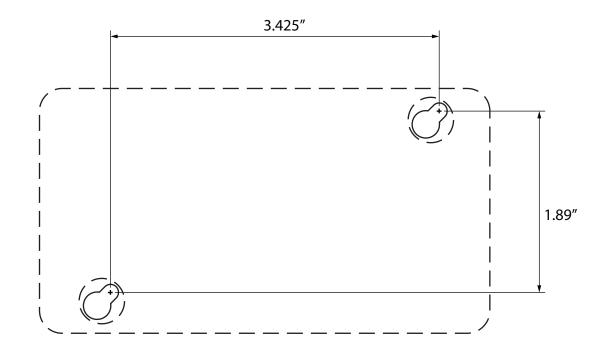

- 1. Place the template on the wall in the position the network extender will be mounted.
- 2. Mark the mounting holes. If mounting on wood, drill holes for the screws. If mounting on drywall, drill holes to accept drywall anchors.
- 3. Leave screws extended about 0.2 inches from the wall.
- 4. Locate the network extender keyhole openings over the screw heads and push down lightly on the network extender to lock it onto the screws.

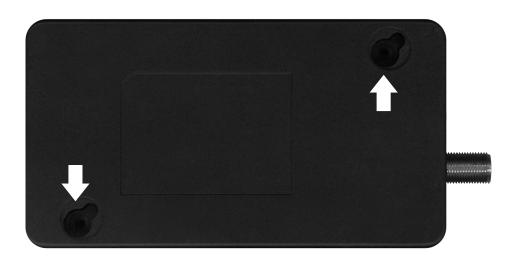

.225 " .75" (2) #4 Slotted/Phillip Hex Washer Screws (2) Plastic Screw Anchors

Illustrations Not to Scale

